


1200 VOLT, 50 AMP MOSFET SIX PACK MODULE

Features

- Electrically isolated, base-less construction
- Light weight, low profile standard package
- Aluminum nitride substrate
- High temperature engineering plastic shell construction

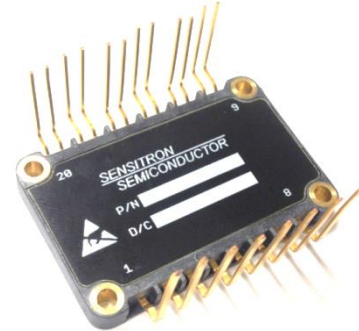

ELECTRICAL CHARACTERISTICS PER MOSFET LEG

(T_J=25°C UNLESS OTHERWISE SPECIFIED)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNIT
MOSFET SPECIFICATIONS					
BV _{DSS}	Drain to Source Breakdown Voltage I _D = 100 μA, V _{GS} = 0V	1200	-	-	V
I _D	Continuous Drain Current T _C = 25°C T _C = 100°C	-	-	90 60	A
I _{D(pulse)}	Pulsed Drain Current, 1ms	-	-	180	A
V _{GS}	Gate to Source Voltage	-	-	-10/+25	V
I _{GSS}	Gate-Source Leakage Current, V _{GS} = +20V	-	-	600	nA
V _{GS(th)}	Gate Threshold Voltage, I _D = 15mA, V _{DS} = V _{GS}	1.8 1.4	2.6 2.2	4.2 3.8	V
I _{DSS}	Zero Gate Voltage Drain Current V _{DS} = 1200 V, V _{GS} = 0V	-	2	100	μA
R _{DS(on)}	Drain-Source On-State Resistance I _D = 50A, V _{GS} = 20V	- -	35 56	40 69	mΩ
C _{iss}	Input Capacitance	-	2810	-	pF
C _{oss}	Output Capacitance	-	393	-	
C _{rss}	Reverse Transfer Cap. V _{DS} = 800 V, V _{GS} = 0 V, f = 1 MHz, V _{AC} = 25 mV	-	14	-	
t _{D(on)}	Turn On Delay Time	-	14	-	ns
t _R	Rise Time	-	32	-	
t _{D(off)}	Turn Off Delay Time	-	29	-	
t _F	Fall Time	-	28	-	
	V _{DS} = 800 V, I _D = 50A, V _{GS} = -5/+20V, R _G = 2.5Ω, R _L = 16Ω				
E _{AS}	Avalanche Energy, Single Pulse I _D = 50A, V _{DS} = 50V	-	3.5	-	J
E _{ON}	Turn on Energy Loss	-	1400	-	μJ
E _{OFF}	Turn off Energy Loss V _{DS} = 800 V, I _D = 50A, V _{GS} = -5/+20V, R _G = 2.5Ω, L = 412μH	-	300	-	
R _{G(int)}	Internal Gate Resistance f = 1MHz, V _{AC} = 25mV	-	1.1	-	Ω
Q _{GS}	Gate to Source Charge	-	46	-	nC
Q _{GD}	Gate to Drain Charge	-	50	-	
Q _G	Total Gate Charge V _{DS} = 800 V, I _D = 50A, V _{GS} = -5/+20V	-	161	-	

DATASHEET 5527, REV -

REVERSE SiC DIODE CHARACTERISTICS

(T_J=25°C UNLESS OTHERWISE SPECIFIED)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNIT	
DIODE SPECIFICATIONS						
V _{SD}	Diode Forward Voltage I _F = 50A		T _J = 25°C T _J = 175°C	1.6 2.25	1.8 2.7	V
I _F	Continuous Forward Current		T _J = 150°C	-	50	A
I _{FRM}	Repetitive Peak Forward Surge Current t _p = 10ms, Half Sine Pulse		T _J = 25°C T _J = 110°C		150 90	A
I _R	Reverse Current V _R = 1200V V _R = 1200V		T _J = 25°C T _J = 175°C	100 300	500 1000	μA
Q _C	Total Capacitive Charge V _R = 800V		T _J = 25°C	246	-	nC
C	Total Capacitance V _R = 0V, T _J = 25°C, f = 1MHz V _R = 400V, T _J = 25°C, f = 1MHz V _R = 800V, T _J = 25°C, f = 1MHz			3380 230 173	-	pF

NTC-THERMISTOR CHARACTERISTICS

(T_J=25°C UNLESS OTHERWISE SPECIFIED)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNIT	
NTC SPECIFICATIONS						
R ₂₅	Resistance		T _C = 25°C	4.7	-	kOhm
R _{TOL}	Resistance Tolerance			-	1	%
P	Maximum Power Dissipation			-	50	mW
B _{25/85}	NTC Thermistor Beta Value			3435		K

Note: Production units are only tested at room temperature. Low/High temperature operation is guaranteed by design.

THERMAL AND MECHANICAL CHARACTERISTICS


SYMBOL	PARAMETER	MIN	TYP	MAX	UNIT
R _{θJB_M}	MOSFET Junction-to- Base Plate Thermal Resistance Per Device	-	0.30	0.33	°C/W
R _{θJB_D}	Diode Junction-to-Base Plate Thermal Resistance Per Device	-	0.33	0.36	°C/W
V _{iso}	Isolation to Base Plate	2500	-	-	VDC
T _J	Operating Junction Temperature	-55	-	150	°C
T _{STG}	Storage Temperature	-55	-	150	°C
	Mounting Torque for Module Mounting (see installation instructions) #4 Size Screw	3	-	4	in-lbs.
	Weight Module	-	15	20	g

Installation instructions:


Recommended thermal interface material = Laird Tgon 805 (5 mil thick graphite pad)

1. Fasten screws to 1 to 2 in-lb of torque in the following sequence: A, B, C, D.
2. Fasten screws to final torque in the same sequence: A, B, C, D


DATASHEET 5527, REV -

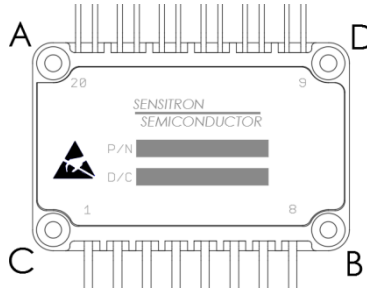


Schematic Diagram:

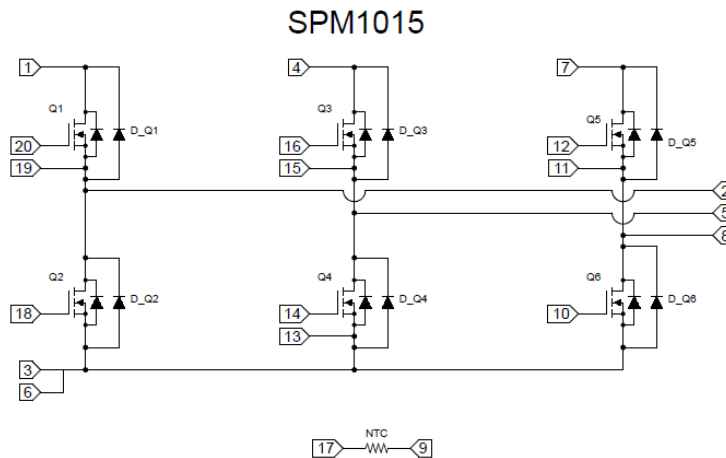

Mechanical Outline (inches):

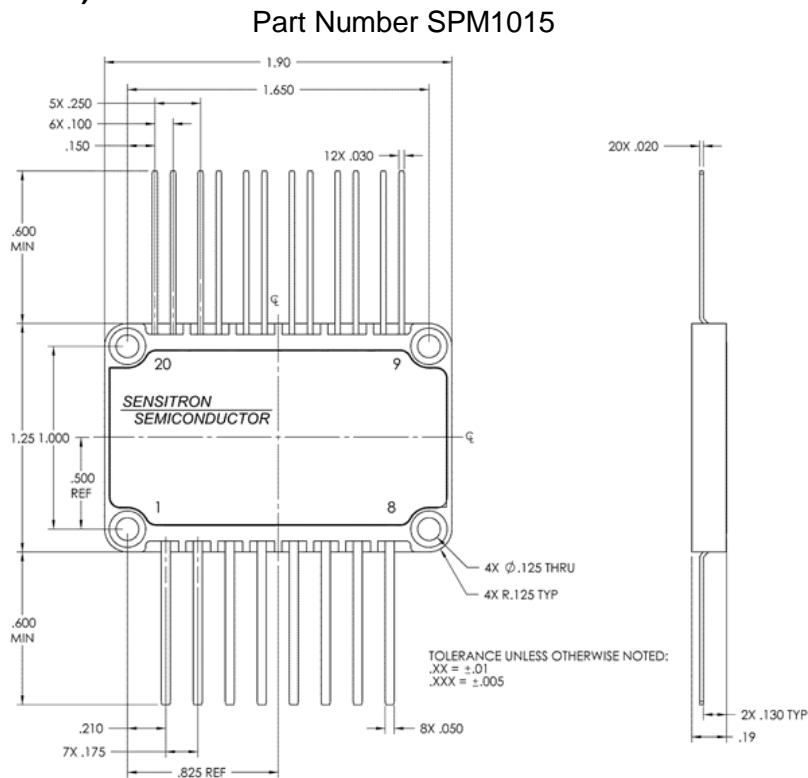

Part Number SPM1015-1

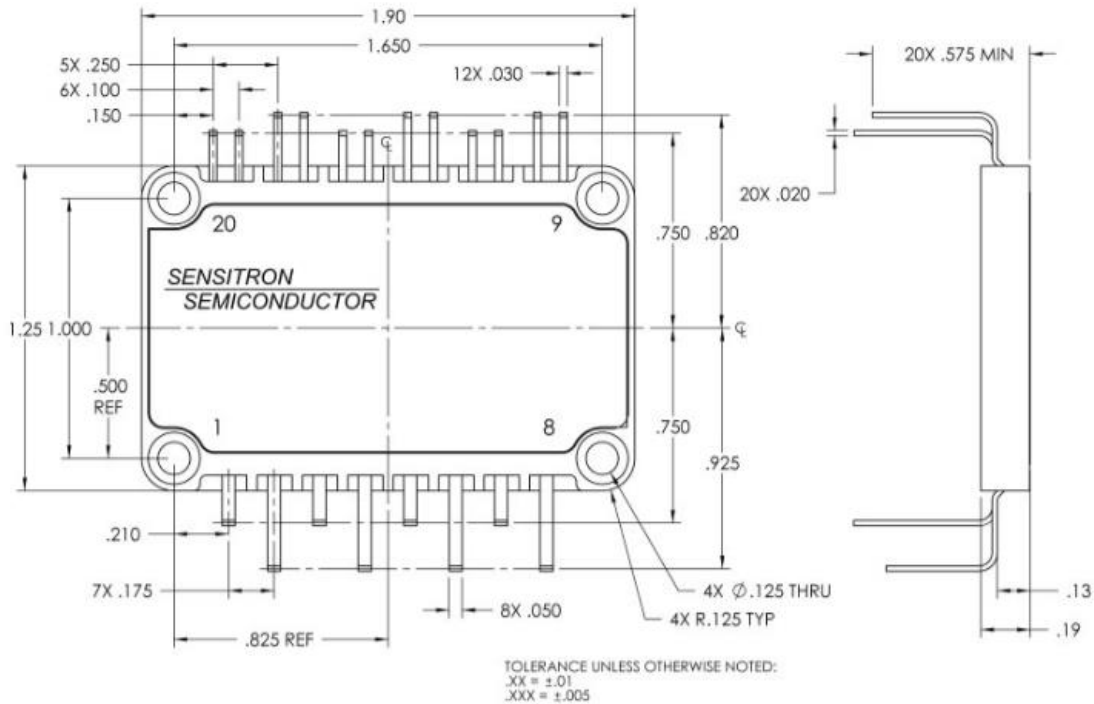

Part Number Description

“SPM1015”: Straight leads

“SPM1015-1”: Leads bent up in staggered configuration

DISCLAIMER:

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.